

NightViu® Driving Light M CB RO 3500

2801701010300



Product information

Order number	2801701010301
Application (Category and Product specific)	Additional main beam and position light

Electrical data

Nominal voltage	12/24 V
Nominal power	60 W (2.5 W)
Connector	DEUTSCH Female DT04-2P 2-Way receptacle

Photometric data

Luminous flux	3500 lm
Colour temperature	6000 K $\pm$ 500K
Light distance at 1lx	$\geq$ 350 m

LED module information

Number of LEDs per module	10 / 36
---------------------------	---------

Weight

Kit	4440.00 g
-----	-----------

Environmentalconditions

Ambient temperature	-30 °C to +60 °C
---------------------	------------------

Lifetime

Service life Tc L70B50 *)	> 5000 h
---------------------------	----------

*) By definition, the module is defect as soon as the luminous flux of 50% of the used LEDs drops below 70% of the specified minimum value


Certificates & Standards

Standards complied:	ECE R10, R112, R7
Certification marks - approval:	E4 approval
Type of protection:	IP69K

Scope of delivery



Dimensions

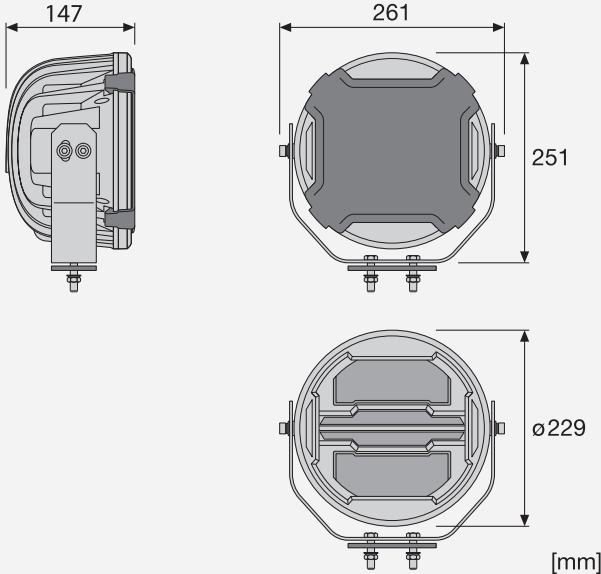

Beam pattern

