

NightViu® LED Working Light FL RE 2500

2801700008300



Product information

Order number	2801700008301
Application	Worklight

Electrical data

Nominal voltage	12/24 V
Nominal power	29 W
Current	1400 mA
Connector	DEUTSCH Female DT04-2P 2-Way receptacle

Photometric data

Luminous flux	2500 lm
Colour temperature	5700 K $\pm$ 500 K

LED module information

Number of LEDs per module	6
---------------------------	---

Dimensions & Weight

Product weight	650 g
Depth	68,4 mm
Width	117.1 mm
Height	113.4 mm

Environmental conditions

Ambient temperature	-40 °C to +90 °C
---------------------	------------------

Lifetime

Service life Tc L70B50 *)	> 5000 h
---------------------------	----------


*) By definition, the module is defect as soon as the luminous flux of 50% of the used LEDs drops below 70% of the specified minimum value

Certificates & Standards

Standards complied:	ECE R10, Limits of CISPR25 Class 5 FCC part 15b
Other legal requirements:	RoHS, REACH
Type of protection:	IP6K8: Immersion waterproof, IP6K9K: Cleaning with high pressure water



Light distribution

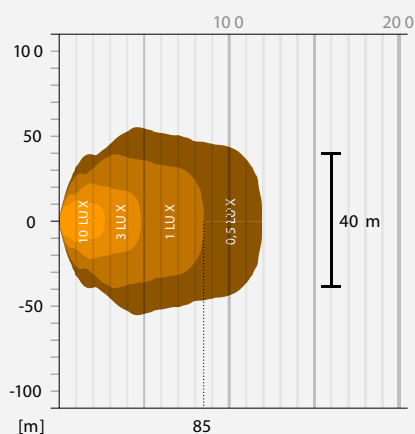

Dimensions

